

2-wire transmitter isolator

3186

- 1 or 2 channel 2-wire transmitter isolator
- Signal 1:1 functional range 3.5...23 mA
- Low channel voltage drop and fast response time
- Excellent accuracy
- Slimline 6 mm housing



Application

- 1:1 output loop powered isolator of 2-wire transmitter 4...20 mA signals.
- 3186 is an easy mounting DIN rail unit.
- A very competitive choice in terms of both price and technology for galvanic isolation of 2-wire transmitter signals.
- Provides surge suppression and protects control systems from transients and noise.
- 3186 eliminates ground loops and can be used for measuring floating signals.
- The device can be mounted in Safe area or in Zone 2 and Cl. 1 Div 2. area.


Technical characteristics

- 3186 is powered by the host loop voltage.
- Wide supply range from 6...35 V.
- Low input to output voltage drop typ. 2.5 V.
- Excellent conversion accuracy, better than 0.05%.
- Functional range is 3.5...23 mA which means that 3186 is NAMUR NE43 compliant.
- Inputs and outputs are floating and galvanically separated.
- High galvanic isolation of 2.5 kVAC.
- Fast response time < 5 ms.
- Excellent signal/noise ratio > 60 dB.

Mounting / installation / programming

- DIN rail mounting with up to 330 channels per meter.
- Temperature operation range is from -25...+70°C.

Connections

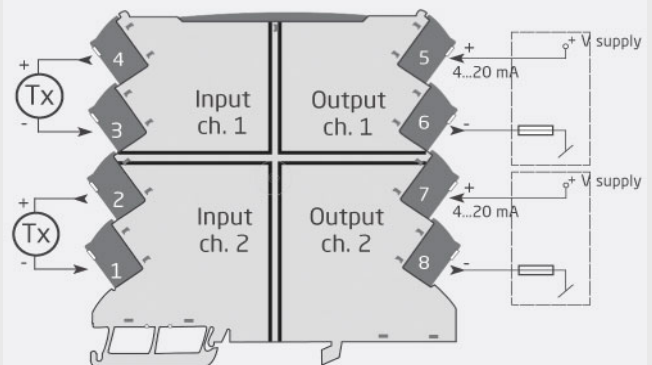

Safe Area or
Zone 2 & Cl. 1, Div. 2, gr. A-D

Order:

Type	Unit channels
3186A1	1
3186A2	2

Environmental Conditions

Specifications range.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13 x 2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...25 Hz.....	±1.6 mm
Vibration: 25...100 Hz.....	±4 g

Common specifications**Supply**

Supply voltage.....	6...35 VDC
---------------------	------------

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2.....	250 VAC

Response time

Response time (0...90%, 100...10%).....	< 5 ms
---	--------

Internal consumption, per channel.....	50 mW
Signal / noise ratio.....	> 60 dB
Accuracy.....	Better than 0.05%
Cut-off frequency (3 dB).....	100 Hz
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

Input specifications**Current input**

Measurement range.....	3.5...23 mA
2-wire transmitter supply.....	3.5...32.5 V
Signal conversion.....	1:1

Output specifications**Current output**

Signal range.....	3.5...23 mA
Output loop current limitation, typ.....	24 mA
Current output overload, max.....	50 mA

Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
RoHS.....	2011/65/EU

Approvals

ATEX 2014/34/EU.....	KEMA 10ATEX0147 X, II 3 G Ex nA IIC T4 Gc
IECEx.....	KEM 10.0068X
FM.....	3041043-C
CCOE.....	P337347/1
EAC.....	TR-CU 020/2011
DNV Marine.....	Stand. f. Certific. No. 2.4
GL.....	V1-7-2
UL.....	UL 61010-1