

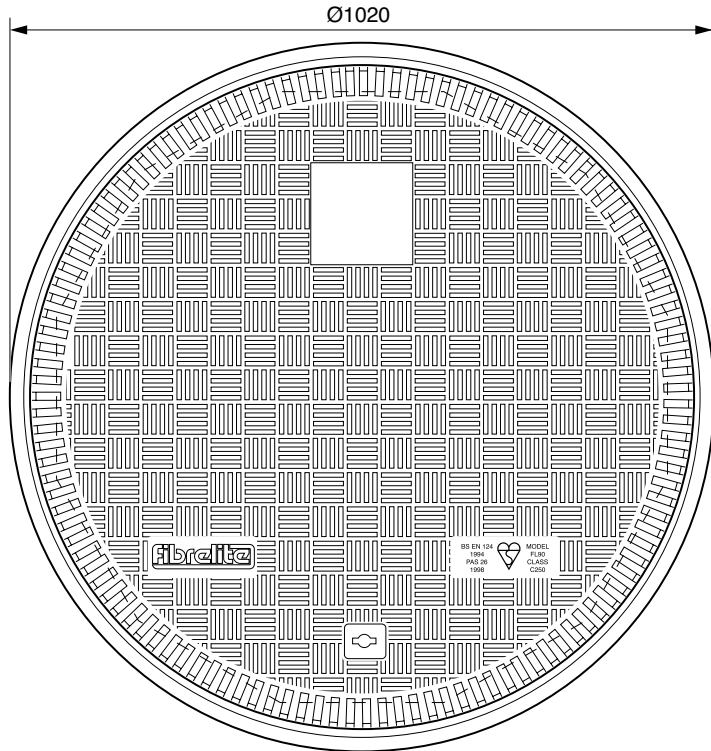


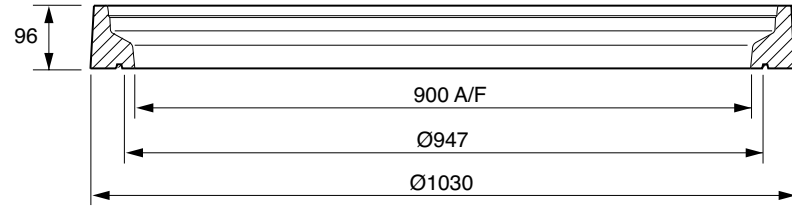

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY

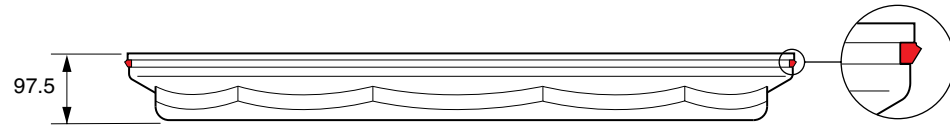

Load Rating	Cover Weight	Frame Weight
B125	21 kg	9.5 kg
TCR	31.5 kg	9.5 kg
C250*	31.5 kg	9.5 kg
D400	48 kg	9.5 kg
F900	88 kg	9.5 kg

* Awarded British Standard Kite Mark

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



CONCRETE

VERY IMPORTANT


OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPORTANT

The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.


Minimum 200mm
Maximum 350mm

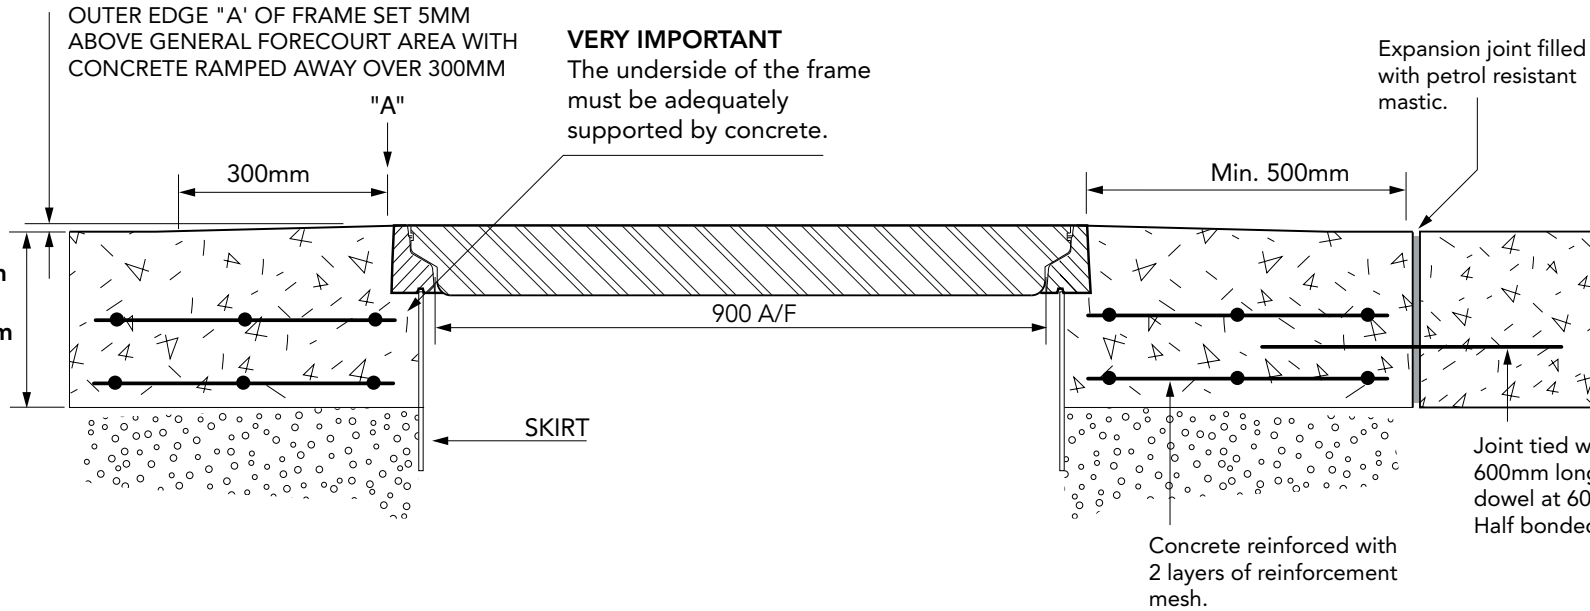

TARMACADAM



TARMACADAM (THICKNESS AS SPECIFIED)

Minimum 200mm
Maximum 350mm

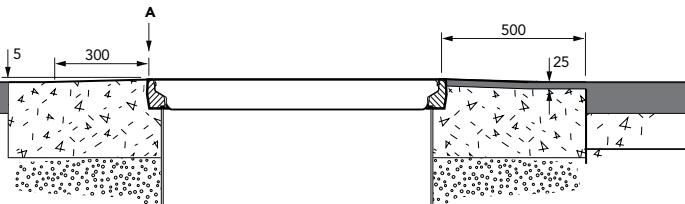

SETTS

Minimum 200mm
Maximum 350mm

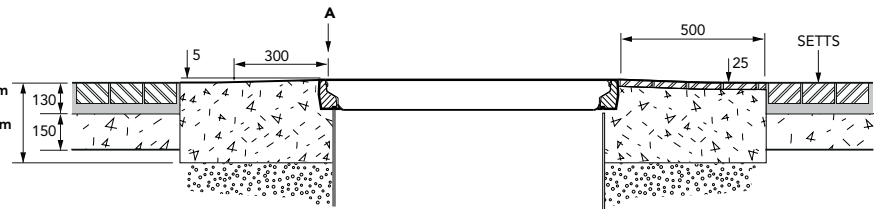

900mm diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

