



 $36\ensuremath{^{"}}$  diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



 FL90
 Issue: 29/03/2023
 Page: 1 of 3
 © Copyright

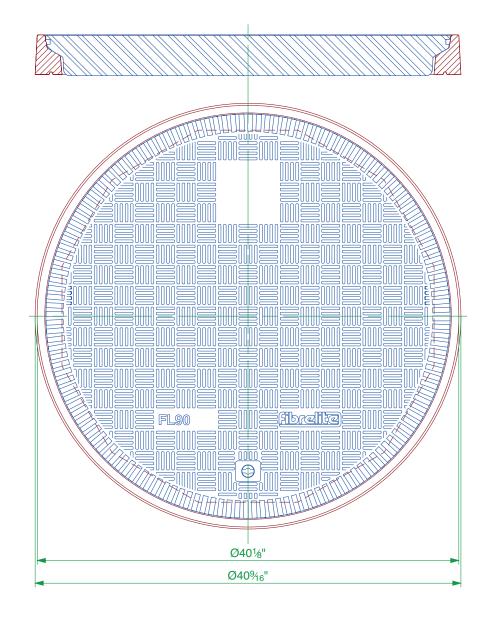

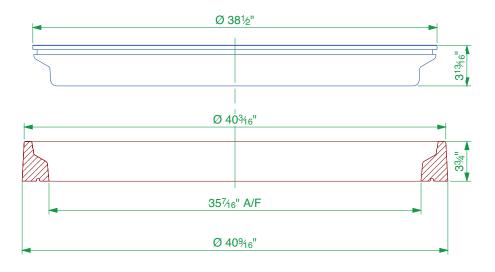

FIBRELITE COVER TYPE	LOAD RATING	TEST LOAD	POUNDS/ FORCE	COVER WEIGHT
Light Duty (LD)	B125	125 kN	28,000	46 lbs
Standard Duty (SD)	C250	250 kN	56,000	83 lbs
Heavy Duty (HD)	D400	400 kN	89,000	83 lbs


36" diameter flat sealed composite cover with a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE


**FL90 Issue:** 29/03/2023 **Page:** 2 of 3 © Copyright

## **CONCRETE**

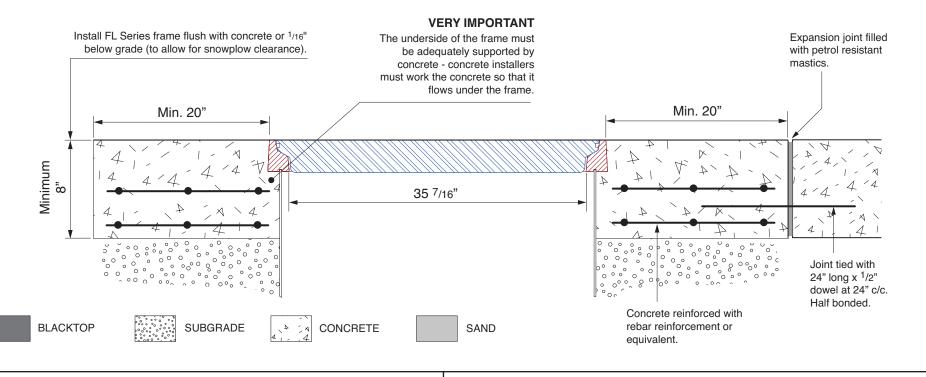

**PAVING STONES / BRICKWORK** 

## BLACKTOP (THICKNESS AS SPECIFIED) Minimum 8" Maximum 13 3/4"

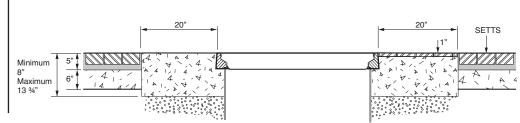

36" diameter flat sealed composite cover with a composite frame.

FL90

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

