

## Isolated converter

### 3104

- Isolation and conversion of standard DC signals
- Slimline housing of 6 mm
- Power supply and signal isolator for 2-wire transmitter
- Loop supply >17 V
- DIP-switch configured




#### Application

- Isolation and conversion of standard DC signals.
- Galvanic separation of analog current and voltage signals.
- Elimination of ground loops and measurement of floating signals.
- A competitive choice in terms of both price and technology for galvanic isolation of current and voltage signals to SCADA systems or PLC equipment.
- Installation in ATEX Ex zone 2 / IECEx zone 2 / FM division 2.
- Suitable for environments with high vibration stress, e.g. ships.

#### Technical characteristics

- Easy configuration via DIP-switches.
- The input is protected against overvoltage and polarity error.
- Factory-calibrated measurement ranges.
- Inputs and outputs are floating and galvanically separated.

#### Connections

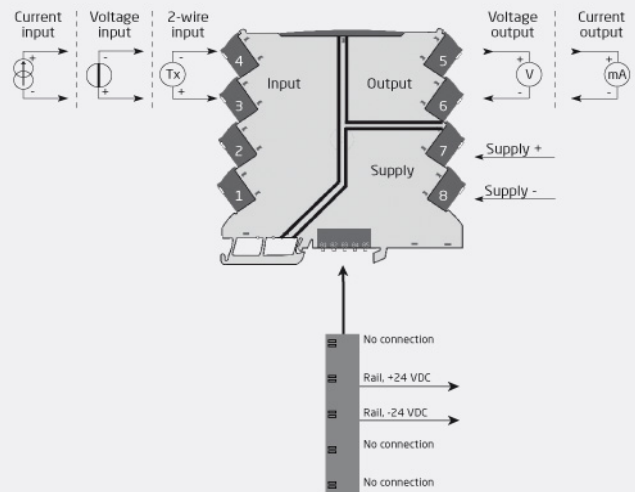

*Safe Area or  
Zone 2 & Cl. 1, Div. 2, gr. A-D*

Order:

Type
3104

## Environmental Conditions

Specifications range.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

## Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13 x 2.5 mm <sup>2</sup> / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration: 2...25 Hz.....	±1.6 mm
Vibration: 25...100 Hz.....	±4 g

## Common specifications

### Supply

Supply voltage.....	16.8...31.2 VDC
---------------------	-----------------

### Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2.....	250 VAC

### Response time

Response time (0...90%, 100...10%).....	< 7 ms
Max. required power.....	1.2 W
Internal consumption.....	0.4 W (typ.) / 0.65 W (max.)
Programming.....	DIP-switches
Signal / noise ratio.....	> 60 dB
Accuracy.....	Better than 0.05% of selected range
Temperature coefficient.....	< ±0.01% of span / °C
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

## Input specifications

### Current input

Measurement range.....	0...23 mA
Programmable measurement ranges.....	0...20 and 4...20 mA
Input voltage drop.....	< 1.5 VDC

### Voltage input

Measurement range.....	0...10.25 V
Functional range.....	0...11.5 V / 0...5.75 V
Programmable measurement ranges.....	0/1...5 and 0/2...10 V
Input resistance.....	≥ 500 kΩ
2-wire transmitter supply.....	> 17 V / 20 mA

## Output specifications

### Current output

Signal range.....	0...23 mA
Programmable signal ranges.....	0 / 4...20 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.01% of span / 100 Ω
Current limit.....	≤ 28 mA

### Voltage output

Signal range.....	0...10 VDC
Programmable signal ranges.....	0/1...5 and 0/2...10 V
Load (@ voltage output).....	≥ 10 kΩ

\*of span..... = of the DIP-switch selected output range

## Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
RoHS.....	2011/65/EU

## Approvals

ATEX 2014/34/EU.....	KEMA 10ATEX0147 X, II 3 G Ex nA IIC T4 Gc
IECEx.....	KEM 10.0068X
FM.....	3041043-C
DNV Marine.....	Stand. f. Certific. No. 2.4
GL.....	V1-7-2
UL.....	UL 61010-1
EAC.....	TR-CU 020/2011
EAC Ex TR-CU 012/2011.....	RU C-DK.GB08.V.00410
COCOE.....	P337347/1