

## TC converter

### 3101

- High accuracy, better than 0.1% of span
- Slimline housing of 6 mm
- Excellent EMC performance and 50/60 Hz noise suppression
- Selectable < 30 ms / 300 ms response time
- Pre-calibrated temperature ranges selectable via DIP-switches



#### Application

- The 3101 temperature converter measures standard TC J and K temperature sensors, and provides an analog voltage or current output.
- The 3101 can be mounted in the safe area or in Zone 2 / Division 2 areas.
- Approved for marine applications.


#### Technical characteristics

- Flexibly powered by 24 VDC ( $\pm 30\%$ ) via connectors.
- < 30 ms fast response time with simultaneous sensor error detection when selected.
- Selectable 300 ms response time when signal dampening is needed.
- High conversion accuracy in all available ranges, better than 0.1% of span.
- Meeting the NAMUR NE21 recommendations, the 3101 provides top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- A visible green LED indicates operational status of the unit and the input sensor.
- All terminals are protected against overvoltage and polarity error.
- Excellent signal/noise ratio of > 60 dB.


#### Mounting / installation / programming

- Selectable DIP-settings for easy configuration of more than 1000 factory calibrated measurement ranges.
- The narrow 6 mm housing allows up to 165 units to be mounted per meter of DIN rail, without any air gap between units.
- Wide ambient temperature range of -25...+70°C.

#### Connections

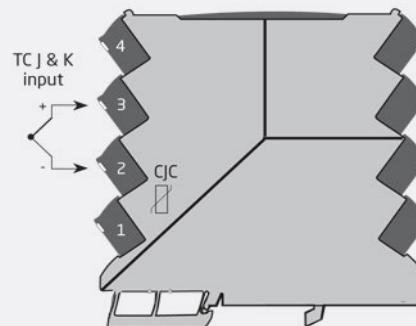

*Safe Area or  
Zone 2 & Cl. 1, Div. 2, gr. A-D*

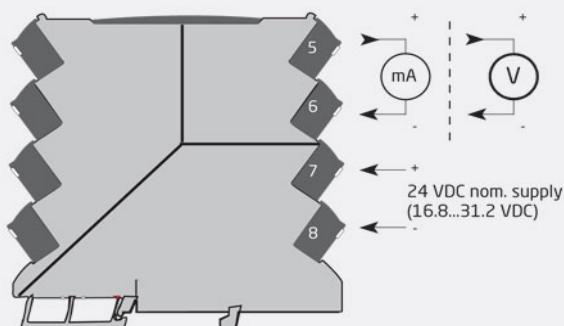

Order:

| Type |
|------|
| 3101 |

## Environmental Conditions

|                              |  |
|------------------------------|--|
| Specifications range.....    | -25°C to +70°C   |
| Storage temperature.....     | -40°C to +85°C   |
| Calibration temperature..... | 20...28°C  |
| Relative humidity.....       | < 95% RH (non-cond.)                                   |
| Protection degree.....       | IP20   |
| Installation in.....         | Pollution degree 2 & measurement / overvoltage cat. II |

## Mechanical specifications

|                             |  |
|-----------------------------|--|
| Dimensions (HxWxD).....     | 113 x 6.1 x 115 mm                                     |
| Weight approx.....          | 70 g   |
| DIN rail type.....          | DIN EN 60715/35 mm                                     |
| Wire size.....              | 0.13 x 2.5 mm <sup>2</sup> / AWG 26...12 stranded wire |
| Screw terminal torque.....  | 0.5 Nm   |
| Vibration.....              | IEC 60068-2-6 : 2007                                   |
| Vibration: 2...25 Hz.....   | ±1.6 mm  |
| Vibration: 25...100 Hz..... | ±4 g   |

## Common specifications

### Supply

|                     |                 |
|---------------------|-----------------|
| Supply voltage..... | 16.8...31.2 VDC |
|---------------------|-----------------|

### Response time

|   |                                     |
|---|-------------------------------------|
| Response time (0...90%, 100...10%).....                     | < 30 ms / 300 ms (selectable)       |
| Max. required power.....                                    | 0.7 W                               |
| Signal / noise ratio.....                                   | > 60 dB                             |
| Programming.....  | DIP-switches                        |
| Signal dynamics, input.....                                 | 23 bit                              |
| Signal dynamics, output.....                                | 18 bit                              |
| Accuracy.....   | Better than 0.1% of selected range  |
| EMC immunity influence.....                                 | < ±0.5% of span                     |
| Extended EMC immunity: NAMUR NE 21, A criterion, burst..... | < ±1% of span                       |
| Incorrect DIP-switch setting identification.....            | 0 V / 0 mA output; LED 0.5 s / 1 Hz |

## Input specifications

### TC input

|  |                                 |
|--|---------------------------------|
| Temperature range, TC J.....                                   | -100...+1200°C                  |
| Temperature range, TC K.....                                   | -180...+1372°C                  |
| Min. measurement range (span) - TC J & K.....                  | 50°C                            |
| Accuracy: the greater of.....                                  | Better than 0.1% of span or 1°C |
| Temperature coefficient: the greater of.....                   | 0.1°C/°C or ≤ ±0.01%/°C         |
| Sensor cable resistance.....                                   | < 5 kΩ per wire                 |
| Cold junction compensation (CJC): Accuracy @ internal CJC..... | Better than ±2.5°C              |
| Internal CJC error detection.....                              | Yes                             |
| Open Thermocouple detection.....                               | Yes - selectable via DIP-switch |

## Output specifications

### Common output specifications

|                    |       |
|--------------------|-------|
| Updating time..... | 10 ms |
|--------------------|-------|

### Current output

|   |   |
|---|---|
| Signal range.....                         | 0...23 mA                                   |
| Programmable signal ranges.....           | 0 / 4...20 mA                               |
| Sensor error indication (0...20 mA).....  | 0 mA or 23 mA / OFF                         |
| Sensor error indication (4...20 mA).....  | 3.5 mA or 23 mA / acc. to NAMUR NE43 or OFF |
| Load (@ current output).....              | ≤ 600 Ω                                     |
| Load stability.....                       | ≤ 0.01% of span / 100 Ω                     |
| Current limitation @ low output load..... | < 60 mA peak / < 4 mA average               |

### Voltage output

|                                 |                                 |
|---------------------------------|---------------------------------|
| Programmable signal ranges..... | 0/1...5 and 0/2...10 V          |
| Sensor error indication.....    | 0 V / 10% above the max. / none |
| Load (@ voltage output).....    | ≥ 10 kΩ                         |
| Open output.....                | < 18 V                          |

## Observed authority requirements

|           |            |
|-----------|------------|
| EMC.....  | 2014/30/EU |
| LVD.....  | 2014/35/EU |
| RoHS..... | 2011/65/EU |

## Approvals

|                      |  |
|----------------------|--|
| ATEX 2014/34/EU..... | KEMA 10ATEX0147 X, II 3 G<br>Ex nA IIC T4 Gc |
| IECEx.....           | KEM 10.0068X                                 |
| FM.....              | 3041043-C                                    |
| DNV Marine.....      | Stand. f. Certific. No. 2.4                  |
| GL.....              | V1-7-2                                       |
| EAC.....             | TR-CU 020/2011                               |
| UL.....              | UL 61010-1                                   |