



Model 334 Series Single Poppet Foot Valve & Model 335A Double Poppet Foot Valve

SPECIFICATION SHEET

Application

Installed at the inlet of a suction line normally at the bottom of the storage tank as a prime holding valve.

Features and Details


- Metal to metal seat for long life
- Screen helps filter debris from collecting on the seats

Materials of Construction

- Body and poppet... brass
- Screen... 20 mesh stainless steel
- **335A**— Dual seats provide twice the prime holding capability as single poppet designs



Item Number	Thread Size	OD	Height	Weight (lbs)
334---0100 AV	3/4"	1.62"	3.03"	1.0
334---0200 AV	1"	2.04"	3.52"	1.25
334---0300 AV	1 1/2"	2.78"	4.19"	2.25
334---0400 AV	2"	3.45"	5.06"	4.75
334BP-0100 AV	1 1/2"	2.78"	3.88"	2.50
335A--0100 AV	1 1/2"	2.75"	5.88"	4.50
335A--0200 AV	2"	3.375"	6.78"	6.50

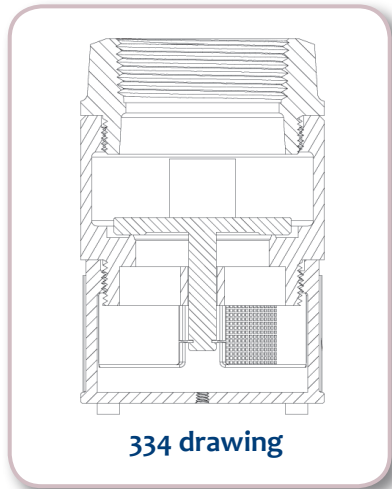

MORRISON BROS. CO.

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238
t. 563.583.5701 | 800.553.4840 | f. 563.583.5028

www.morbros.com