

Switchmode power supply

2222



- 230 or 115 VAC primary voltage
- 24 VDC output voltage
- Double isolation by 3.75 kVAC
- 48 Watt output power, short circuit-protected
- Thermal protection against overload



Advanced features

- The power supply is based on primary switchmode technology to achieve a high efficiency.
- An internally mounted potentiometer allows for a $\pm 5\%$ adjustment of the output voltage.


Application

- General 24 VDC supply for equipment that requires a stabilised DC voltage.
- Two units can be connected in series to achieve a plus / minus supply or a higher output voltage.
- Separation of circuits in safety installations according to the PELV/SELV norm.
- Galvanic isolation between the primary and the secondary voltage is achieved through the double-isolated safety transformer.

Technical characteristics

- A green LED in the front of the module indicates an active primary voltage.
- Input circuit protected with a thermal fuse.
- DC output short circuit protection with current limiter.
- Mounting for a standard 11-pole socket which can be adapted for DIN rail or plate use with PR's 7023 adaptor and 7024 mounting keying.

Connections

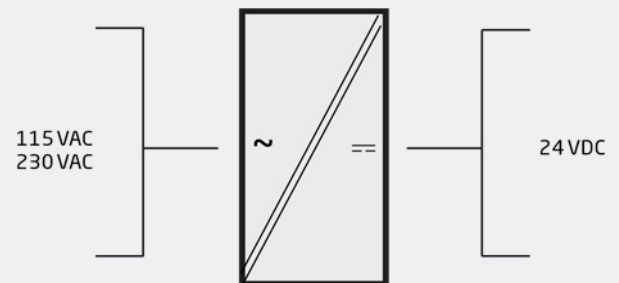

Order:

Type	Input	Output
2222	115 VAC : A	24 VDC : 1
	230 VAC : B	

Environmental Conditions

Specifications range..... -20°C to +60°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree..... IP30

Mechanical specifications

Dimensions (HxWxD)..... 80.5 x 35.5 x 84.5 mm (D is without pins)
 Weight approx..... 210 g

Common specifications**Isolation voltage**

Isolation voltage, test / working..... 3.75 kVAC / 250 VAC
 PELV/SELV..... IEC 61140

Fuse..... 1 A SB / 250 VAC
 Max. required power..... 60 VA
 Effect of supply voltage change..... < 1% ($\pm 10\%$)
 Efficiency..... $\geq 80\%$
 Thermal overload protection..... 100°C
 Power derating..... 1% / °Camb. (Tamb. > 40°C)
 Transient stability (10%-max. load)..... < 500 mV
 Temperature coefficient..... 0.05% / °C
 EMC immunity influence..... < $\pm 0.5\%$

Input specifications

Supply voltage..... 207...253 VAC
 Supply voltage..... 102.4...132.2 VAC
 Frequency..... 50...60 Hz

Output specifications**Current output**

Current limit..... Nom. 2.5 A (electronic)
 Output voltage..... 24 VDC
 Adjustment..... $\pm 5\%$
 Output power..... 48 W (max.)
 Output current..... 2 A / 24 VDC
 Load effect, (0-max. load)..... < 1.5% / A
 Output ripple..... ≤ 40 mVRMS (100 kHz)

Observed authority requirements

EMC..... 2014/30/EU
 LVD..... 2014/35/EU

Approvals

EAC..... TR-CU 020/2011