


# PERFORMANCE WITH A TWIST

## Delivering Value

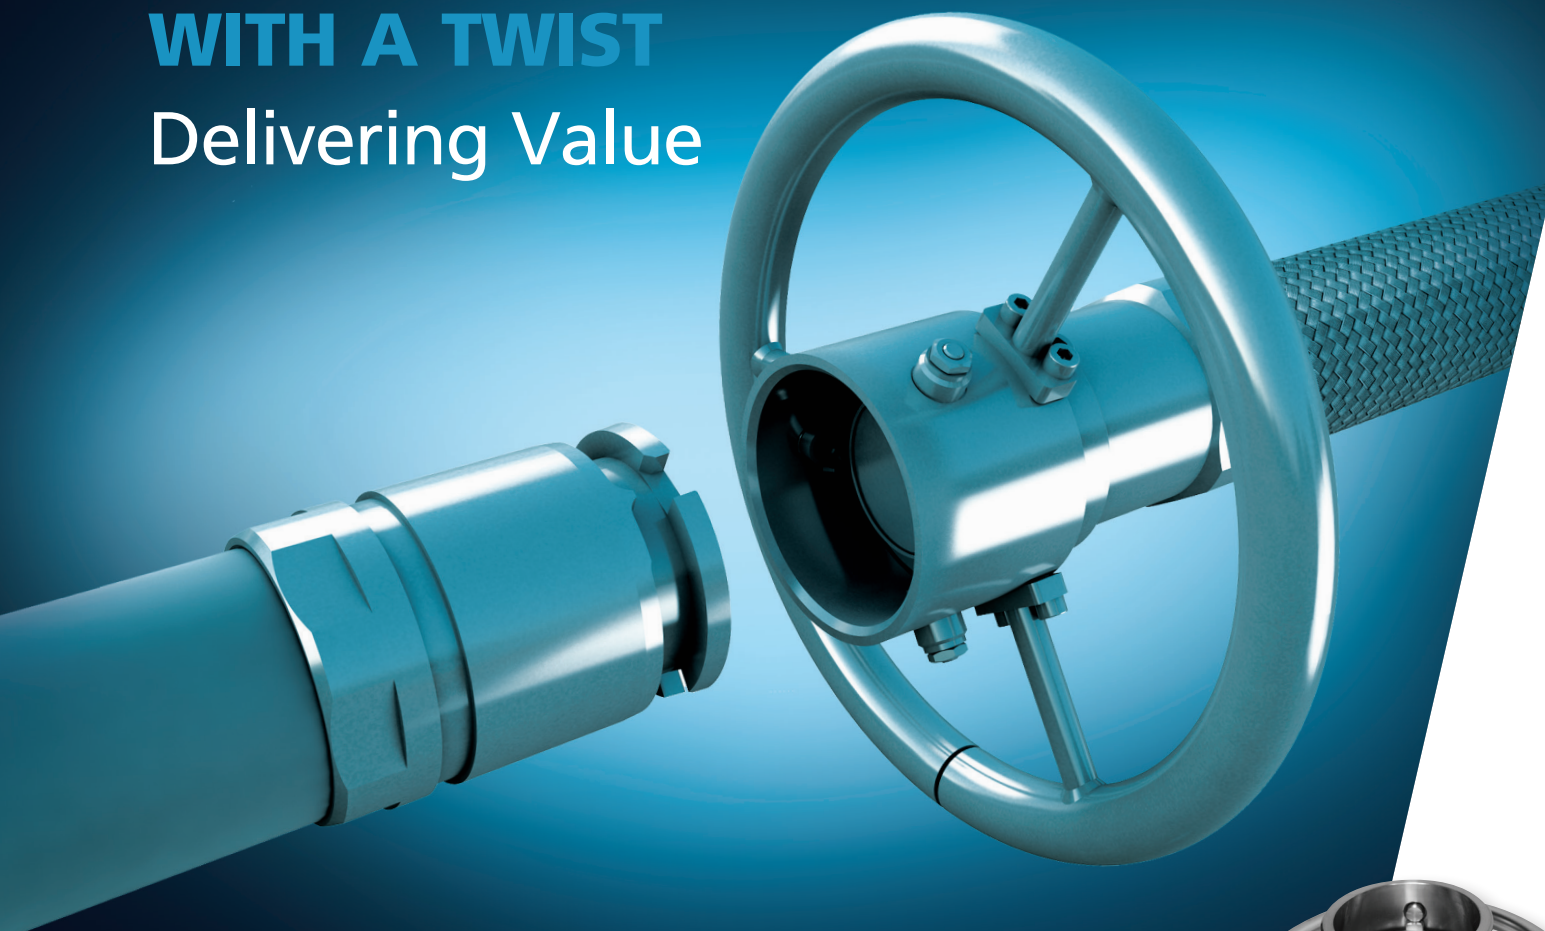

**Twist-Lok™**  
Dry Disconnect Coupler

Minimize fluid loss with the quick and easy connection

Twist-Lok™ represents the latest addition to OPW's industry-leading range of Dry Disconnect Couplers. With its user-friendly operation and simple handling, the Twist-Lok provides a quick, easy connection with minimal product loss.

### Features & Benefits:

- **FULLY INTERCHANGEABLE** with other manufacturers, such as TODO-MATIC, Mann Tek, etc. Manufactured in accordance with NATO STANAG 3756.
- **Pressure Ratings** up to 360 PSI; ideal for LPG and other higher-pressure applications.
- **316 STAINLESS-STEEL** construction
- **AVAILABLE** in 1", 2", 3" and 4" sizes. Larger sizes available upon request.
- **INTEGRAL HEAVY-DUTY SWIVEL** to aid connection and minimize hose wear.
- **DOUBLE SAFETY:** Fully Interlocked plus locking mechanism in open position.
- **PRODUCT SELECTIVITY** available via mechanical keying – minimizes risk of cross contamination.
- **SUITABLE FOR VACUUM SERVICE**



[opw-es.com](http://opw-es.com)

ENGINEERING | WHAT'S NEXT

# Twist-Lok™


## Dry Disconnect Coupler

### Materials of Construction


Stainless Steel (316Ti) - standard			
Seals	Fluorocarbon Seals (standard), EPDM, FFKM	Connections	FNPT, ANSI Flanges; others upon request
Pressure Rating	Up to 360 psi (25 bar)	Sizes	1", 2", 3", 4"; larger sizes upon request
Temperature Rating	-40°F-350°F (-40°C-177°C)	Approvals	European and American Railcar Approvals AAR Approval No. E989073-A

### Ordering Information

#### Couplers & Adaptors

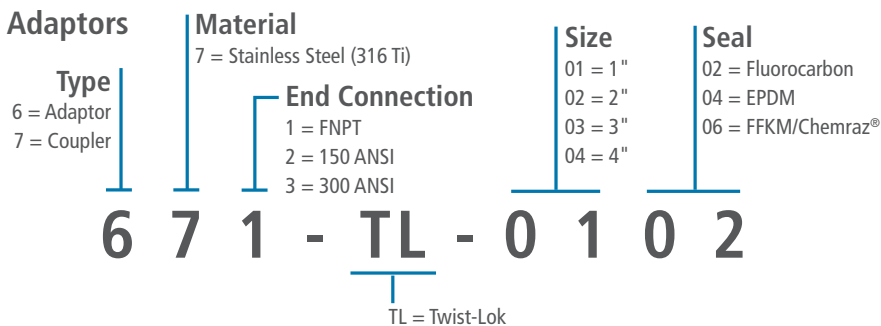

#### Seal Kits

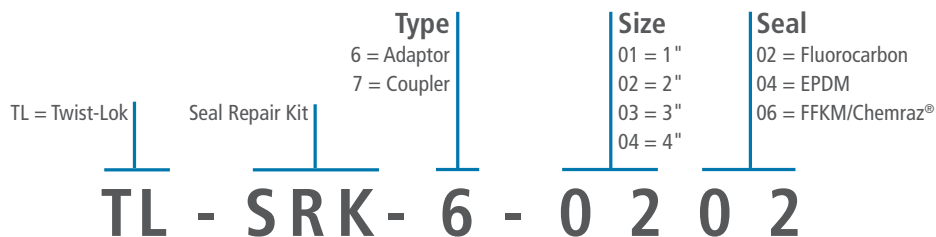

#### Dust Caps & Plugs\*

