


## Universal transmitter



### 4114

- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2-wire supply > 16 V
- FM-approved for installation in Div. 2
- Output for current and voltage
- Universal AC or DC supply

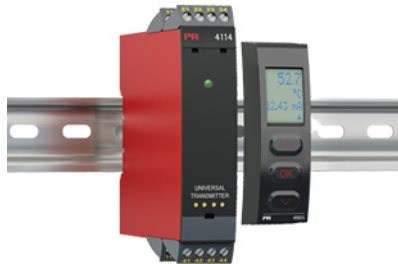

#### Advanced features

- Programmable by way of detachable display front (4501), process calibration, signal simulation, password protection, error diagnostics and help text available in several languages.

#### Application


- Linearized, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a standard analog current / voltage signal, i.e. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control with standard analog output.
- Galvanic separation of analog signals and measurement of floating signals.
- The 4114 is designed according to strict safety requirements and is therefore suitable for application in SIL 2 installations.

#### Technical characteristics

- When 4114 is used with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4114 is designed with electronic hardware switches, it is not necessary to open the device for setting of DIP-switches.
- A green / red front LED indicates normal operation and malfunction.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.


#### Connections

##### Input signals:

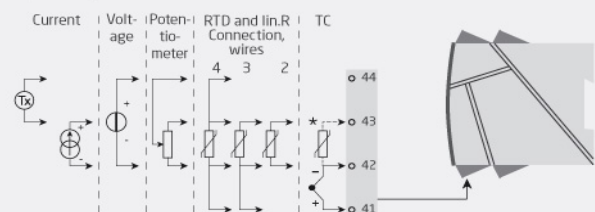


\*Order separately: CJC connector 5910.

##### Output signals:

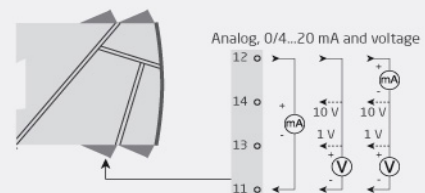

##### Supply:

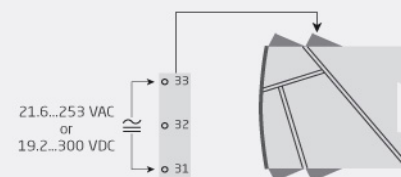

Order:

Type
4114

## Environmental Conditions

Specifications range.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

## Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501 / 4511.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	145 g
Weight incl. 4501 / 4511 (approx.).....	160 g / 245 g
Wire size.....	1 x 2.5 mm <sup>2</sup> stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...13.2 Hz.....	±1 mm
Vibration: 13.2...100 Hz.....	±0.7 g

## Common specifications

### Supply

Supply voltage, universal.....	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
--------------------------------	--

### Isolation voltage

Isolation voltage, test / working.....	2.3 kVAC / 250 VAC
--	--------------------

### Response time

Temperature input (0...90%, 100...10%).....	≤ 1 s
mA / V input (0...90%, 100...10%).....	≤ 400 ms

### Auxiliary supplies

2-w. supply (term. 44...43).....	25...16 VDC / 0...20 mA
Fuse.....	400 mA SB / 250 VAC
Max. required power.....	≤ 2.0 W
Programming.....	Communication enabler 4511 / Programming front 4501
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of selected range
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

## Input specifications

### RTD input

RTD type.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000 Ni50, Ni100, Ni120, Ni1000, Cu10, Cu20, Cu50, Cu100
Cable resistance per wire (max.).....	50 Ω
Sensor current.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Yes
Short circuit detection.....	< 15 Ω

### Linear resistance input

Linear resistance min...max.....	0 Ω...10000 Ω
----------------------------------	---------------

### Potentiometer input

Potentiometer min...max.....	10 Ω...100 kΩ
------------------------------	---------------

## TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C

### CJC via internally mounted

sensor.....	±(2.0°C + 0.4°C * Δt)
Δt = .....	Internal temperature-ambient temperature

Sensor error detection.....	Yes
Sensor error current: When detecting / else.....	Nom. 2 μA / 0 μA

## Current input

Measurement range.....	0...20 mA
Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance.....	Nom. 20 Ω + PTC 50 Ω
Sensor error detection: Loop break 4...20 mA.....	Yes

## Voltage input

Measurement range.....	0...12 VDC
Programmable measurement ranges.....	0/0.2...1, 0/1...5, 0/2...10 VDC
Input resistance.....	Nom. 10 MΩ

## Output specifications

### Current output

Signal range.....	0...20 mA
Programmable signal ranges.....	0...20 / 4...20 / 20...0 and 20...4 mA
Load (@ current output).....	≤ 800 Ω
Load stability.....	≤0.01% of span / 100 Ω
Sensor error indication.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Output limitation, on 4...20 and 20...4 mA signals.....	3.8...20.5 mA
Output limitation, on 0...20 and 20...0 mA signals.....	0...20.5 mA
Current limit.....	≤ 28 mA

### Voltage output

Signal range.....	0...10 VDC
Programmable signal ranges.....	0/0.2...1; 0/1...5; 0/2...10; 1...0.2/0; 5...1/0; 10...2/0 V
Load (@ voltage output).....	≥ 500 kΩ
*of span.....	= of the currently selected measurement range

## Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU

## Approvals

FM.....	3025177
UL.....	UL 508
EAC.....	TR-CU 020/2011
DNV Marine.....	Stand. f. Certific. No. 2.4
SIL.....	Hardware assessed for use in SIL applications